**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# H-DS - Grommet Channels




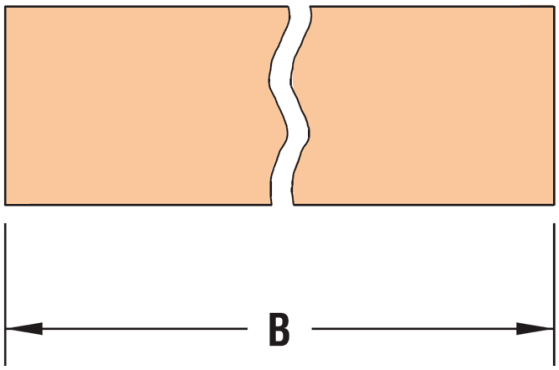




Details:

- **Material: PA66/6 MDS Filled Nylon**
- **Flammability Rating: UL94 HB**
- **Colour: grey**
- Temperature Range: -40°C to 65°C
- Good durability; MDS glue filling adheres to rubber, most plastics, wood and metal.
- Features built-in lubricant for reduced friction and longer part life.

| Symbol | Panel thickness range | A | B | Material | Flammability | Color |
|---|---|---|---|---|---|---|
| | [mm] | [mm] | [m] | | | |
| H-12431R | 0.5 - 3.2 | 9.5 | 30.5 | PA | UL94 HB | grey |