



## H-EXR - Expansion rivets

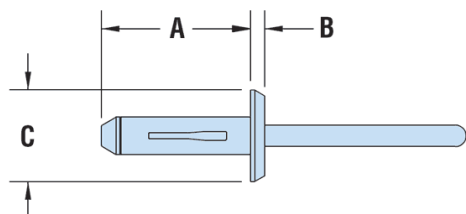

**Typ 1**  
Type 1

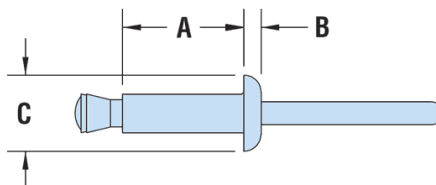

**Typ 2**  
Type 2



### Details:

- **Type 1:**
  - **Body material:** Nylon 6/6
  - **Pin material:** Acetal (POM)
  - Body flammability: UL94 V-2
  - Pin flammability: UL94 HB
- **Type 2:**
  - **Body material:** Nylon 6/6
  - **Pin material:** polycarbonate
  - Body and pin flammability: UL94 V-2
- Colour: black
- Temperature Range: -40°C to 120°C
- One-piece, all plastic expansion rivet.
- Designed to securely fasten a wide variety of materials in a range of applications.
- Inserts quickly from either side of assembly.
- Use with standard rivet setting tool - pull the pin through the body and panels are drawn together.
- Pin breaks off even with head and leaves an attractive, finished appearance.
- Effective for soft materials such as rubber, padded fabrics, etc.

| Symbol  | Mounting hole diameter | Panel thickness range | A    | Head height B | Head diameter C | Type | Material   | Flammability | Color |
|---------|------------------------|-----------------------|------|---------------|-----------------|------|------------|--------------|-------|
|         | [mm]                   | [mm]                  | [mm] | [mm]          | [mm]            |      |            |              |       |
| H-12656 | 4.9                    | 1.5 - 4.5             | 8    | 2             | 9.6             | 2    | PA 66 + PC | UL94 V-2     | black |