



H-EXR - Expansion rivets

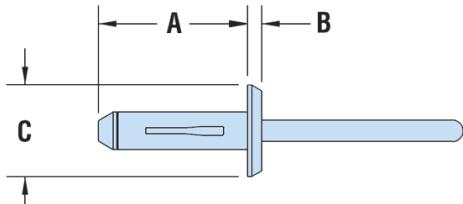

Typ 1
Type 1

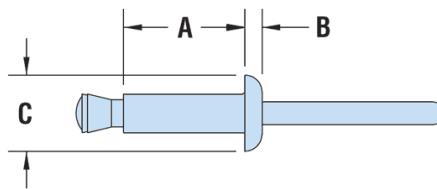

Typ 2
Type 2



ip KONTAKT

Details:

- **Type 1:**
 - **Body material:** Nylon 6/6
 - **Pin material:** Acetal (POM)
 - Body flammability: UL94 V-2
 - Pin flammability: UL94 HB
- **Type 2:**
 - **Body material:** Nylon 6/6
 - **Pin material:** polycarbonate
 - Body and pin flammability: UL94 V-2
- Colour: black
- Temperature Range: -40°C to 120°C
- One-piece, all plastic expansion rivet.
- Designed to securely fasten a wide variety of materials in a range of applications.
- Inserts quickly from either side of assembly.
- Use with standard rivet setting tool - pull the pin through the body and panels are drawn together.
- Pin breaks off even with head and leaves an attractive, finished appearance.
- Effective for soft materials such as rubber, padded fabrics, etc.

| Symbol | Mounting hole diameter | Panel thickness range | A | Head height B | Head diameter C | Typ/Type | Material | Flammability | Color |
|---------|------------------------|-----------------------|------|---------------|-----------------|----------|------------|--------------|-------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | | | | |
| H-12657 | 4.9 | 4.5 - 7.5 | 11.2 | 2 | 9.6 | 2 | PA 66 + PC | UL94 V-2 | black |