
**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# H-NTSS -



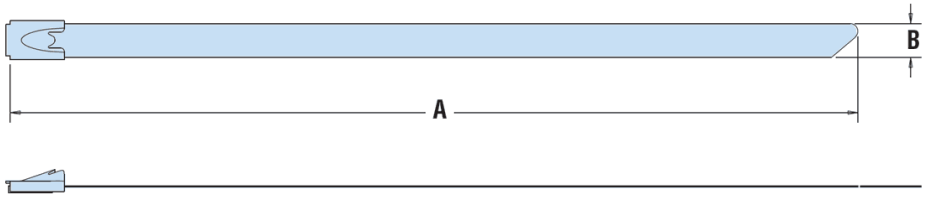


Details:

- **Material: AISI 304 or 316 stainless steel with PVC coating**
- For ease of assembly, position locking head so the widest end is down.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 “Plastic Covered Metal Cable Ties”, “Steel Sea Boats Construction Level Standard.”
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,25 mm) thick.
- Custom lengths available on special order.
- Standard pack: 100 pcs

| Symbol | Tensile strength | Max. cable bundle diameter | Length A | Width B | Material | Coating |
|---|---|---|---|---|---|---|
| | [daN] | [mm] | [mm] | [mm] | | |
| H-12886B | 111.5 | 307 | 1000 | 7.9 | stainless steel 316 | black PVC |