





**H-PMT -**

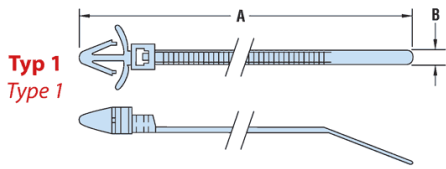


**Typ 1**  
Type 1

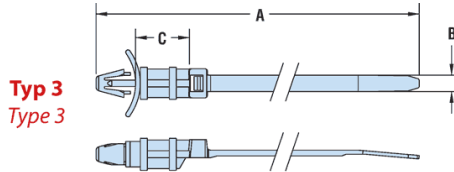

**Typ 3**  
Type 3

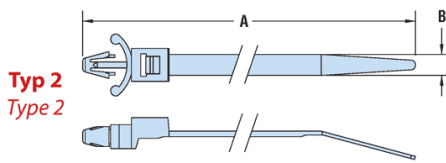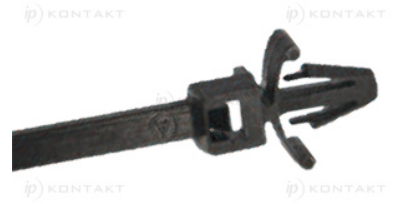

**Typ 2**  
Type 2

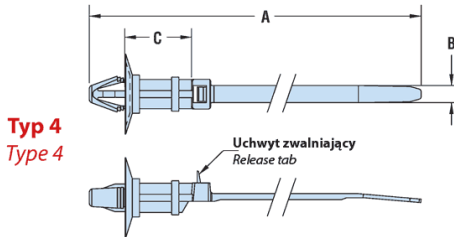

**Typ 4**  
Type 4

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural or UV black
- **Temperature Range:** -40°C to 85°C

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	C	Panel thickness range	Mounting hole diameter range	Type	Material	Flammability	Color
	[daN]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]				
H-13262B	8	19.1	128	2.5	6.1	2	4	3	PA 66	UL94 V-2	black