



## H-RDD - Strain relief bushings


### Typ 1 / Type 1

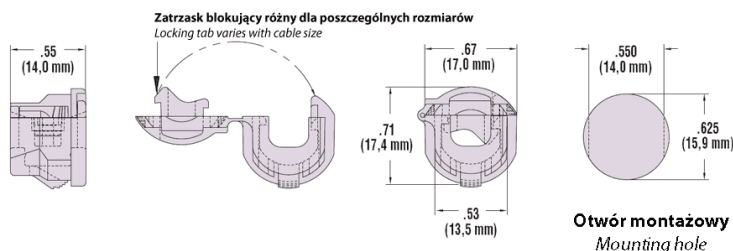

### Typ 2 / Type 2

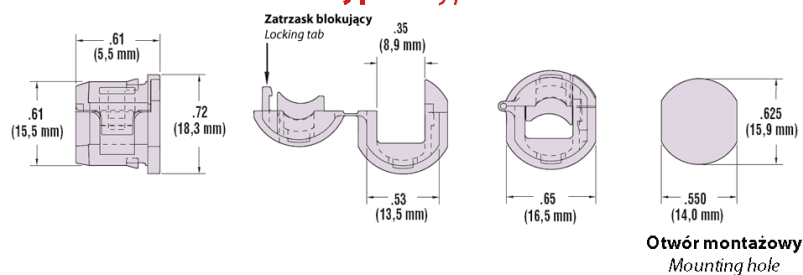

### Typ 3 / Type 3

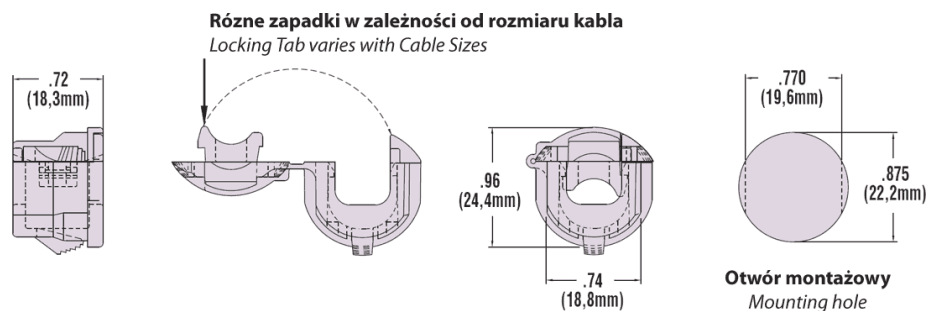

#### Details:

- **Material:** Nylon 6/6
- **Flammability:** UL94 V-2
- Temperature Range: -18°C to 105°C
- Certifications Recognized under UL File E15331
- Certified by the Canadian Standards Association File 8919

| Symbol | Type | Cable diameter range | Panel thickness range | Material | Flammability | Color |
|--------|------|----------------------|-----------------------|----------|--------------|-------|
|        |      | [mm]                 | [mm]                  |          |              |       |
| H-1855 | 3    | 7.4 - 9.8            | 2.0, 3.4              | PA 66    | UL94 V-2     | black |