
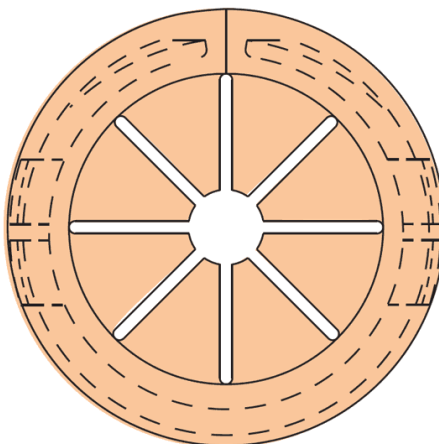


H-OCUB - Open/Closed Universal Bushings

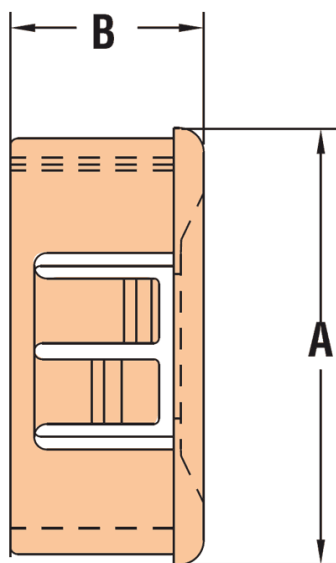

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** black (white and other colours available on special order)
- **Temperature Range:** -18°C to 105°C

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2213SP	38.1	26.9	39.6	10.7	3.2 max.	PA 66	UL94 V-2	black