
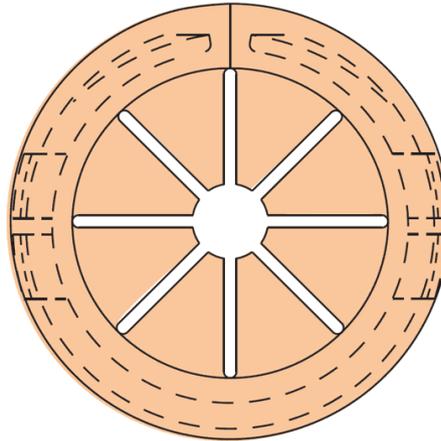


## H-OCUB - Open/Closed Universal Bushings

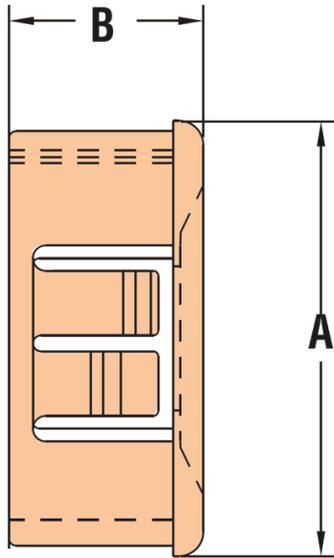

**Details:**

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: black (white and other colours available on special order)**
- **Temperature Range: -18°C to 105°C**

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2422SP	50.8	41.7	53.9	10.7	3.2 max.	PA 66	UL94 V-2	black