

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-SB - Snap Bushing



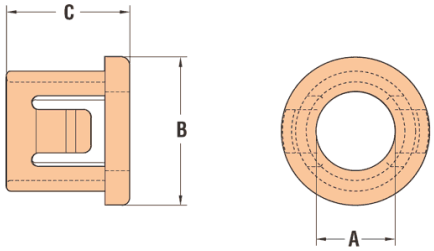

Typ 1 - pojedynczy panel
Type 1 - single panel design

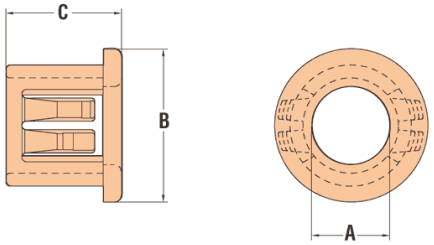

Typ 2 - wiele paneli
Type 2 - multiple panel design

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: black or white**
- Certifications: Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File 8919
- Temperature Range: -18°C to 105°C

Symbol	Mounting hole diameter range	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-2485	152.4	139.2	157.9	18.8	6.4 max.	2	PA 66	UL94 V-2	white