


## H-B - Thin Panel Bushings

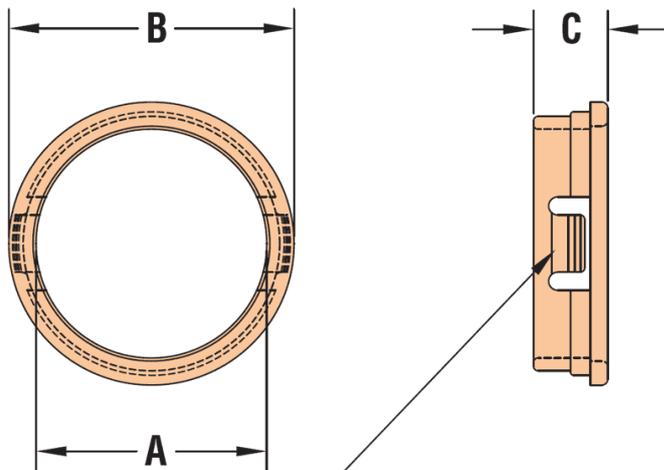

**Wiele stopni blokujących**  
*Multiple finger steps*

**Details:**

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** black (BLK) or white (WH)
- **Temperature Range:** -18°C to 105°C

| Symbol  | Locking steps | Mounting hole diameter | Int. diameter A | Ext. diameter B | Height C | Panel thickness range | Material | Flammability | Color |
|---------|---------------|------------------------|-----------------|-----------------|----------|-----------------------|----------|--------------|-------|
|         | [mm]          | [mm]                   | [mm]            | [mm]            | [mm]     | [mm]                  |          |              |       |
| H-2810N | 0.5, 0.8, 1.2 | 7.9                    | 6.3             | 9.5             | 6        | 1.2 max.              | PA 66    | UL94 V-2     | black |