
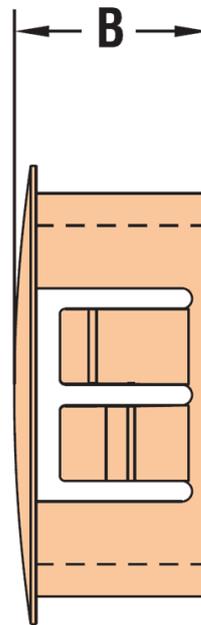


H-DPT -

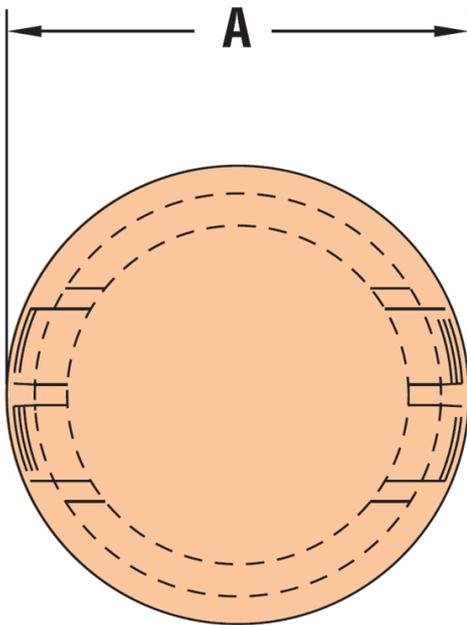

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black or white (other colours available on special order)**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- Convex, matte finish
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Approximate Head Thickness: 1.6 mm. Thickness may vary.

Symbol	Mounting hole diameter range	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-3018	27.8 - 28.6	31	14.3	3.2 - 6.4	PA 66	UL94 V-2	black