
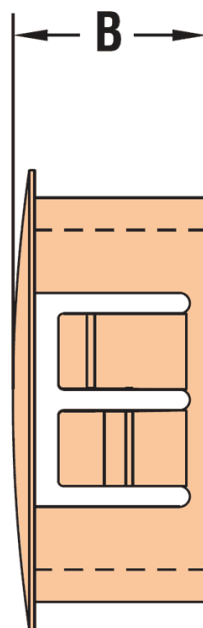


## H-DPT -

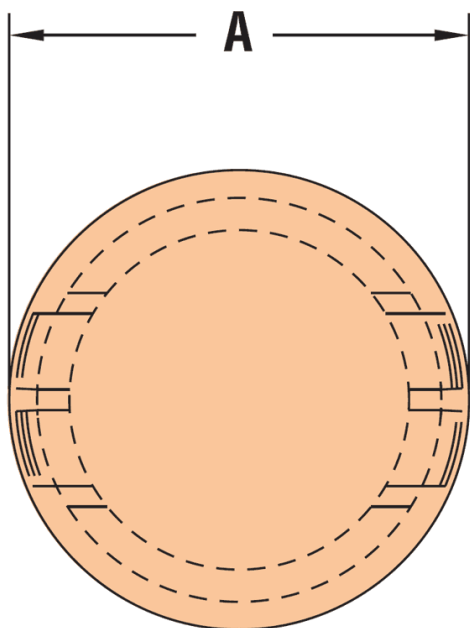

### Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Colour:** black or white (other colours available on special order)
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- Convex, matte finish
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Approximate Head Thickness: 1.6 mm. Thickness may vary.

| Symbol | Mounting hole diameter range | Ext. diameter A | Height B | Panel thickness range | Material | Flammability | Color |
|--------|------------------------------|-----------------|----------|-----------------------|----------|--------------|-------|
|        | [mm]                         | [mm]            | [mm]     | [mm]                  |          |              |       |
| H-3045 | 22.2                         | 25.9            | 14.3     | 3.2 - 6.4             | PA 66    | UL94 V-2     | white |