


H-SBT -

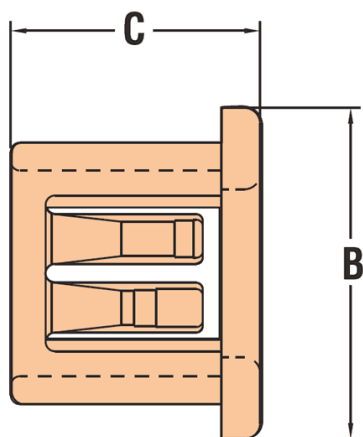

Details:

- **Material:** Nylon 6/6 UL94 HB
- **Colour:** black (BLK) or white (WH)
- Temperature Range: -18°C to 105°C
- H-3085 i H-3088 - Notched head, triple locking finger design
- H-2830, H-2831, H-2840, H-2841 - Single Locking Step for Panel Thickness up to 6,4 mm

Symbol	Mounting hole diameter range	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-3128	27.8 - 28.6	23.8	30.9	14.3	6.4 max.	PA 66	UL94 HB	black