


## H-KOS-LT -

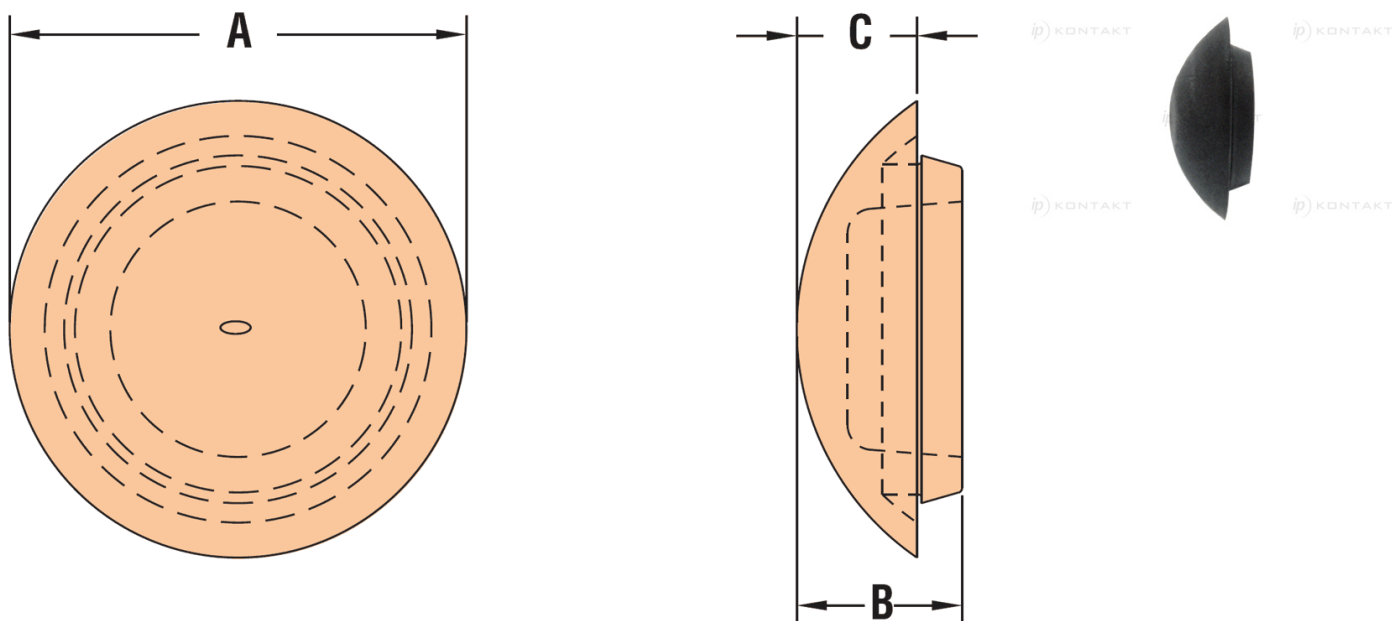

### Details:

- **Material: TPE**
- **Flammability Rating: UL94 V-0**
- **Colour: black, grey**
- Temperature Range: -60°C to 135°C
- Certifications: UL File E51579
- Oil tight, rain tight, submersible
- Install with fingertip pressure (no tool required).

| Symbol   | Mounting hole diameter | Flange diameter A | B    | C    | Panel thickness range | Shore A hardness | Material | Flammability | Color |
|----------|------------------------|-------------------|------|------|-----------------------|------------------|----------|--------------|-------|
|          | [mm]                   | [mm]              | [mm] | [mm] | [mm]                  |                  |          |              |       |
| H-3835FP | 27.8                   | 38.6              | 14   | 10.2 | 3.2 max.              | 75               | TPE      | UL94 V-0     | grey  |