


H-KOS-LT -

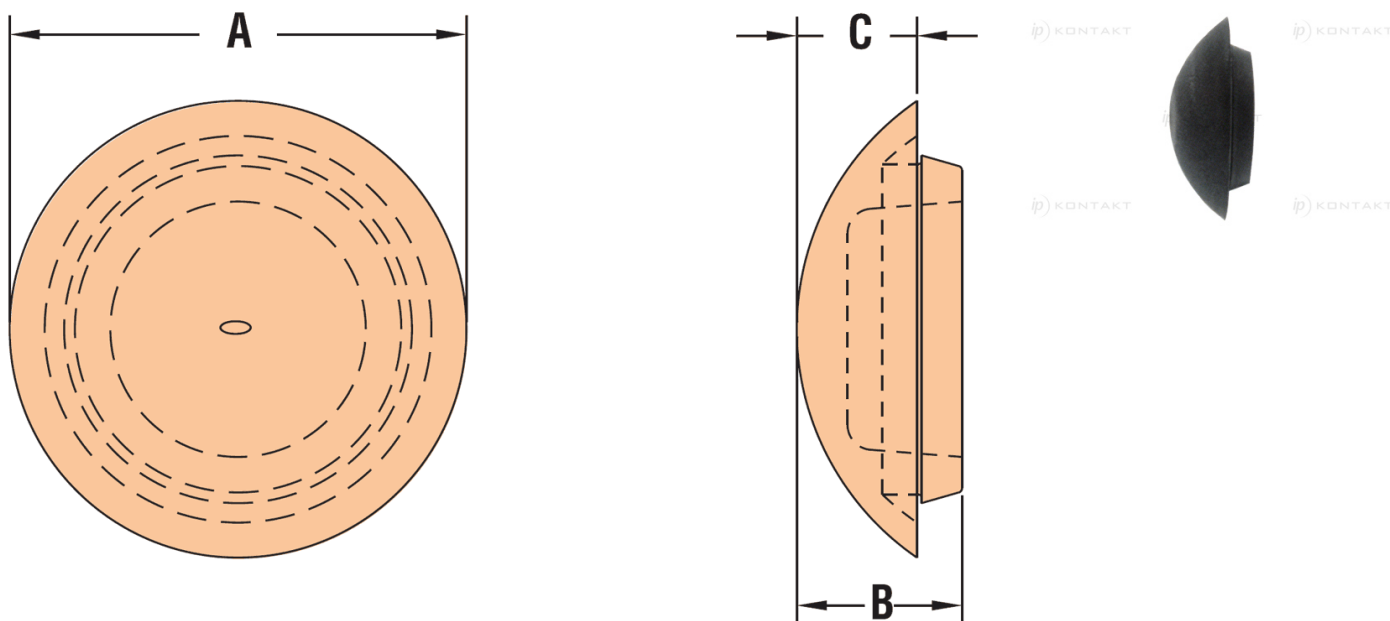

Details:

- **Material: TPE**
- **Flammability Rating: UL94 V-0**
- **Colour: black, grey**
- Temperature Range: -60°C to 135°C
- Certifications: UL File E51579
- Oil tight, rain tight, submersible
- Install with fingertip pressure (no tool required).

Symbol	Mounting hole diameter	Flange diameter A	B	C	Panel thickness range	Shore A hardness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-3837FP	34.9	45.2	14.3	10.7	3.2 max.	75	TPE	UL94 V-0	grey