



**H-PMT -**

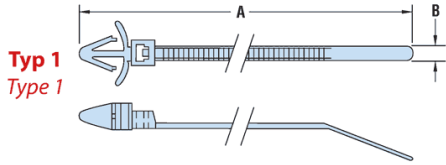



**Typ 1**

Type 1

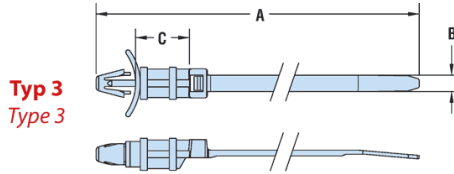


**Typ 3**

Type 3

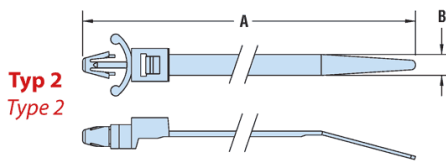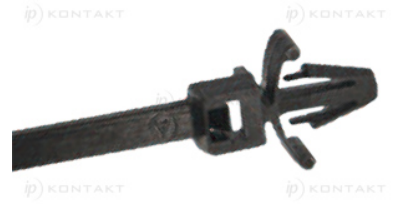

**Typ 2**

Type 2

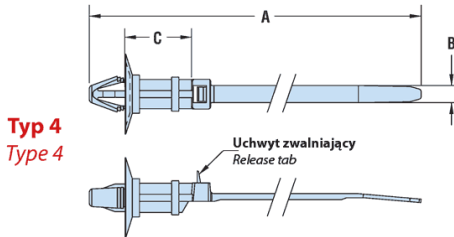

**Typ 4**

Type 4

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: natural or UV black**
- **Temperature Range: -40°C to 85°C**

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	C	Panel thickness range	Mounting hole diameter range	Type	Material	Flammability	Color
	[daN]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]				
H-3904	22.2	44.5	203	4.8	-	3.2	6.4	1	PA 66	UL94 V-2	natural