


## H-PMLL - Standoff Loops - Arrowhead Mount

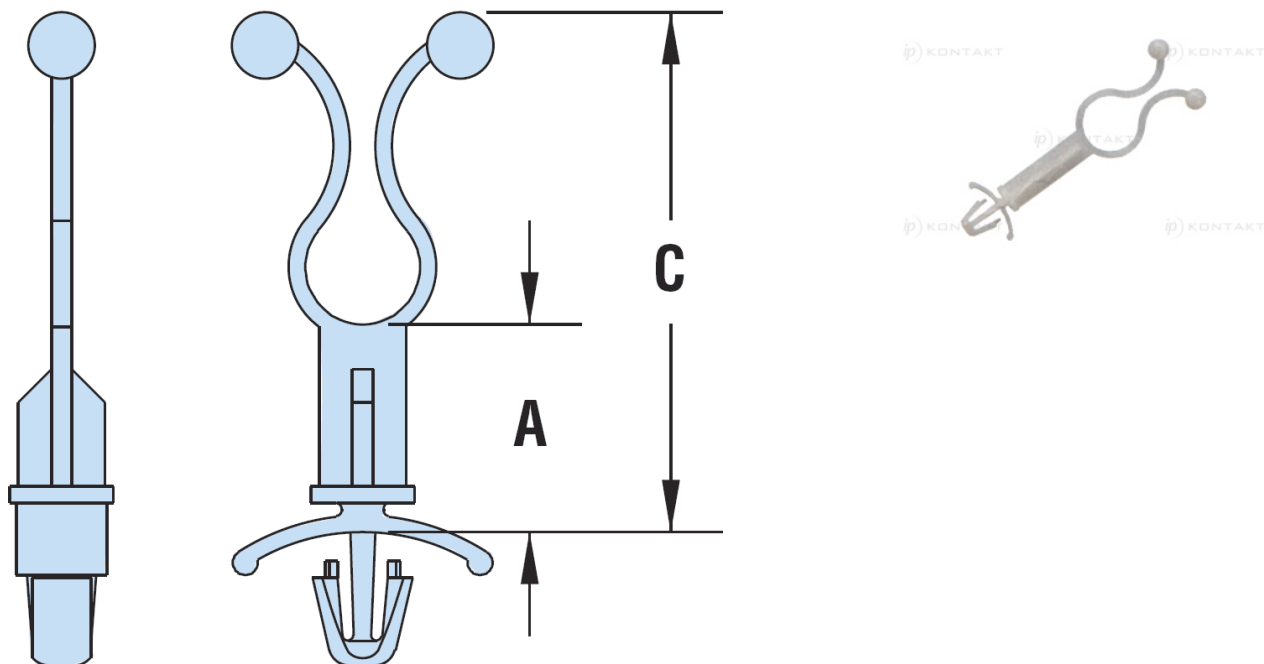

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature Range: 0°C do 85°C
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.

| Symbol | Panel thickness range | Max. cable bundle diameter | A    | C    | Mounting hole diameter | Material | Flammability | Color   |
|--------|-----------------------|----------------------------|------|------|------------------------|----------|--------------|---------|
|        | [mm]                  | [mm]                       | [mm] | [mm] | [mm]                   |          |              |         |
| H-4163 | 0.8 - 2.0             | 10                         | 25.4 | 48.5 | 6                      | PA 66    | UL94 V-2     | natural |