


H-BMLL - Standoff Loops - Blind Mount

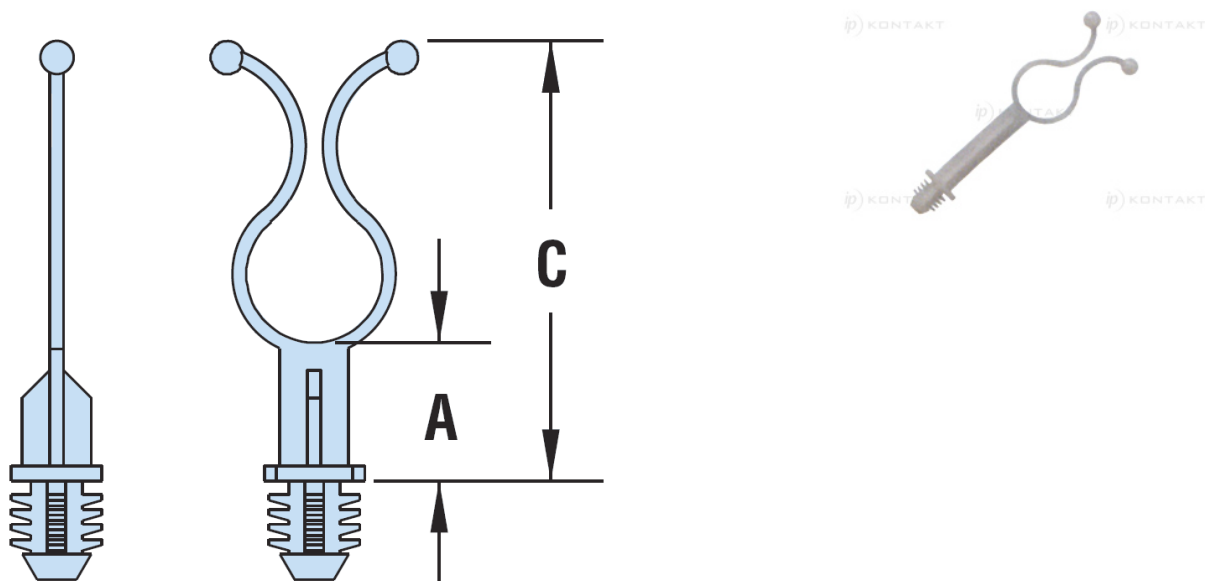

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature Range: 0°C do 85°C
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.
- Minimum panel thickness: 6.4 mm

Symbol	Max. cable bundle diameter	A	C	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-4175	12.5	4.8	32.5	7.9	6.4 min.	PA 66	UL94 V-2	natural