

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*


H-DC -

H-4240, H-4250





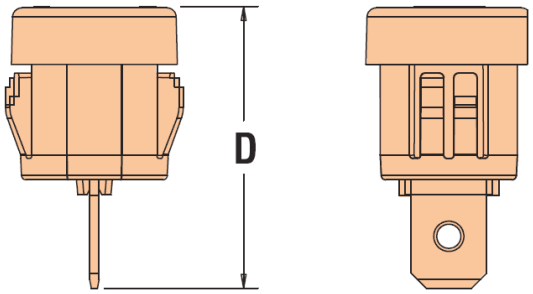






Otwór montażowy
Mounting hole



H-4380




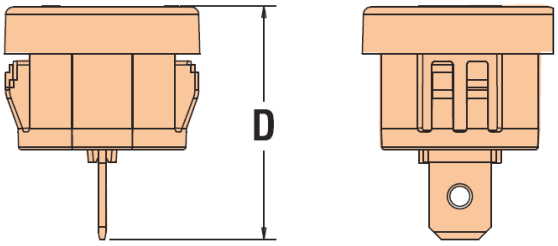





Otwór montażowy
Mounting hole


H-4440



Ø19.8










Otwór montażowy
Mounting hole


H-4428



Ø19.8










Otwór montażowy
Mounting hole


H-4270



Ø14










Otwór montażowy
Mounting hole


H-4410



Ø19.8










Otwór montażowy
Mounting hole


H-4470



Ø19.8










Otwór montażowy
Mounting hole


H-4468



Ø19.8







Otwór montażowy
Mounting hole

Details:

- **Material: Polycarbonate UL94 V-0**
- **Colour: black, other colours available on special order**
- Certifications Recognized under the Component Program of Underwriters’ Laboratories File E467283 to both Canadian and US Requirements Flammability
- Temperature Range: 32°C to 130°C
- Small, snap-in nylon receptacles for low cost, insulated, quick connection or disconnection of your wires, through panels, housings or detachable shrouds.
- Typical uses are data processing and vending machines, motors, power supplies, and controls.
- H-4240, H-4250, H-4380, H-4440, H-4428 - Bushings with Double Male Terminals
- H-4270, H-4410, H-4470, H-4468 - Bushings with Tinned Male to Solder Terminals

Symbol	Polarized	Number of poles	Terminal width	A	B	C	D	Material	Flammability	Color
			[mm]	[mm]	[mm]	[mm]	[mm]			
H-4240	no	1	6.4	12.7	11.8	3.2	23.9	PC	UL94 V-0	black