
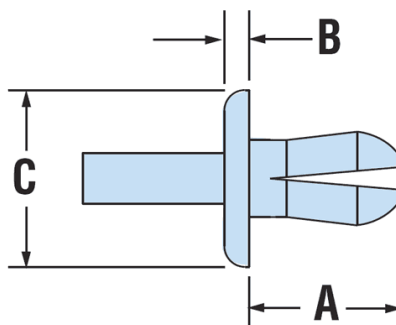


H-DR - Drive rivets

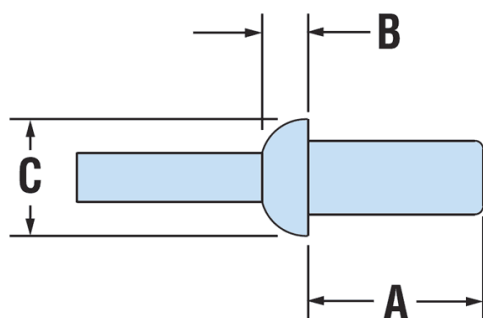

Details:

- **Material:** Nylon 6
- **Colour:** black {BLK} or natural (NAT)
- Flammability Rating: UL 94 V-2
- Temperature Range: -40°C to 85°C
- Install by placing rivet into hole and pushing the drive pin into the rivet to expand legs and lock in place.
- No tools required.

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-9187	4.8	4.0 - 7.1	9.7	1.5	10.9	PA 6	UL94 V-2	natural