


## H-DSC - D-Subminiature Protection Caps

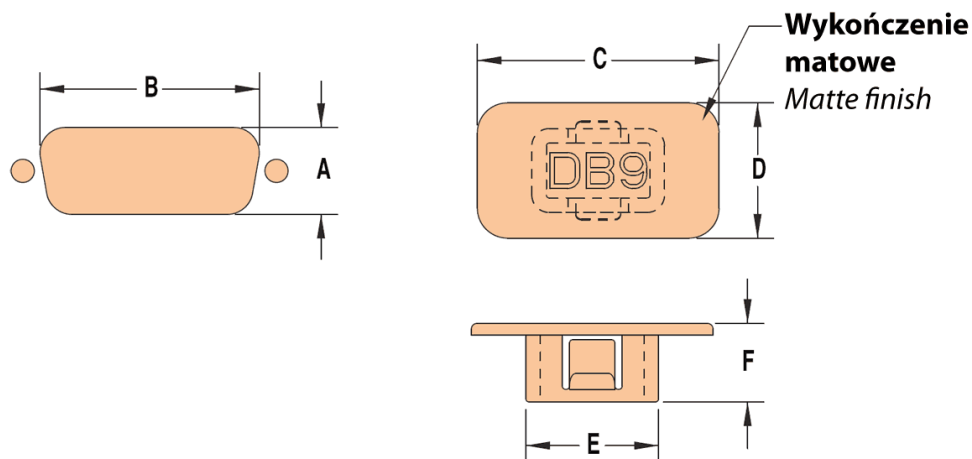

### Details:

- **Material: Pink Static Dissipative Ethylene Vinyl Acetate (EVA).**
- **Colour: pink**
- Temperature Range: -68°C to 60°C
- Provides electrostatic discharge protection for rectangular D-subminiature input/output type connectors.
- integral flange for easy application and removal
- Fit over both Standard Density and High Density D-Sub Shells.
- Molded in pink dissipative ethylene vinyl acetate, which meets the static decay requirements of MIL-PRF-81705D: Surface resistivity less than  $1 \times 10^{12} \Omega/\text{sq}$ .

| Symbol  | Type               | A    | B    | C    | D    | E    | F    |
|---------|--------------------|------|------|------|------|------|------|
|         |                    | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |
| H-G5162 | 2 or A - 15 Socket | 7.9  | 24.6 | 27.9 | 11.4 | 26.4 | 9.5  |