


H-DSC - D-Subminiature Protection Caps

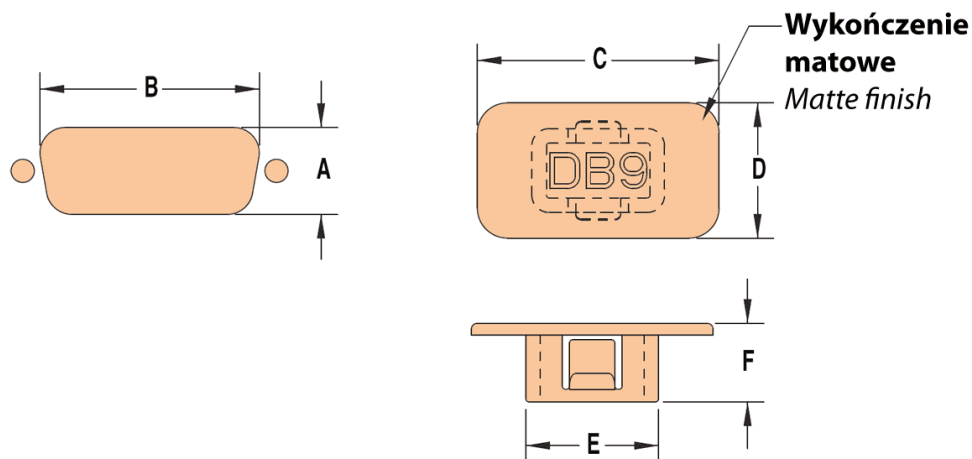

Details:

- **Material:** Pink Static Dissipative Ethylene Vinyl Acetate (EVA).
- **Colour:** pink
- Temperature Range: -68°C to 60°C
- Provides electrostatic discharge protection for rectangular D-subminiature input/output type connectors.
- integral flange for easy application and removal
- Fit over both Standard Density and High Density D-Sub Shells.
- Molded in pink dissipative ethylene vinyl acetate, which meets the static decay requirements of MIL-PRF-81705D: Surface resistivity less than $1 \times 10^{12} \Omega/\text{sq.}$

Symbol	Type	A	B	C	D	E	F
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
H-G5168	5 or D - 50 Socket	10.7	52.4	56.1	14.2	54.5	12.3