


## H-DSC - D-Subminiature Protection Caps

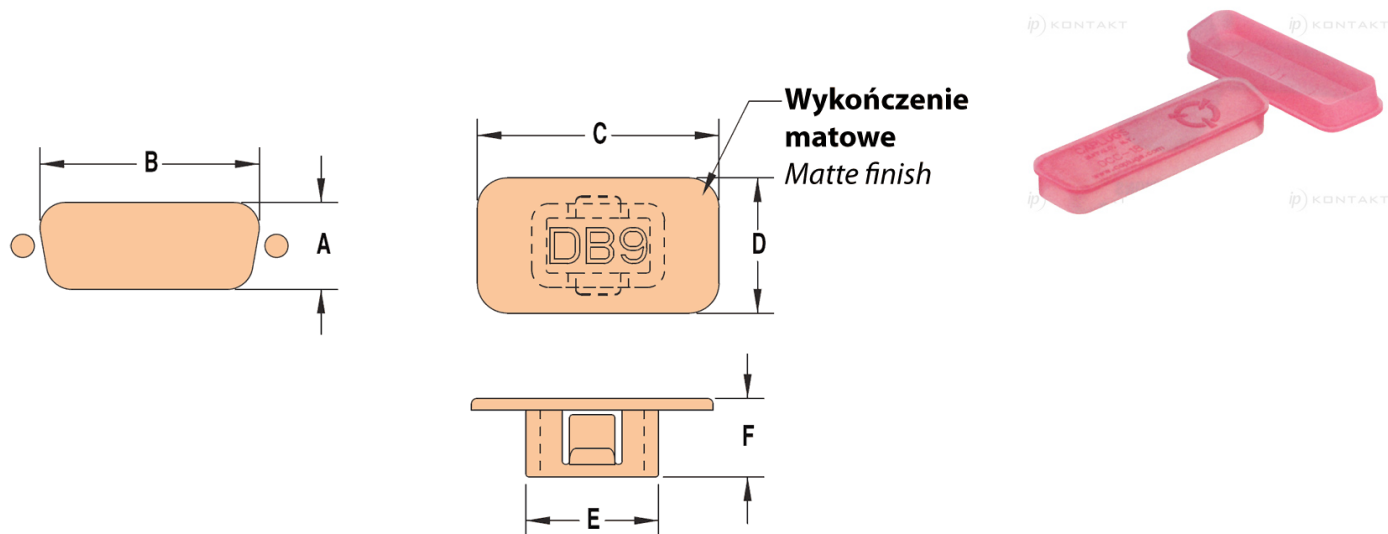

Details:

- **Material:** Pink Static Dissipative Ethylene Vinyl Acetate (EVA).
- **Colour:** pink
- Temperature Range: -68°C to 60°C
- Provides electrostatic discharge protection for rectangular D-subminiature input/output type connectors.
- integral flange for easy application and removal
- Fit over both Standard Density and High Density D-Sub Shells.
- Molded in pink dissipative ethylene vinyl acetate, which meets the static decay requirements of MIL-PRF-81705D: Surface resistivity less than  $1 \times 10^{12} \Omega/\text{sq.}$

| Symbol  | Type            | A    | B    | C    | D    | E    | F    |
|---------|-----------------|------|------|------|------|------|------|
|         |                 | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |
| H-G5169 | 5 or D - 50 Pin | 11.1 | 52.8 | 57.6 | 15.7 | 55.8 | 14   |