
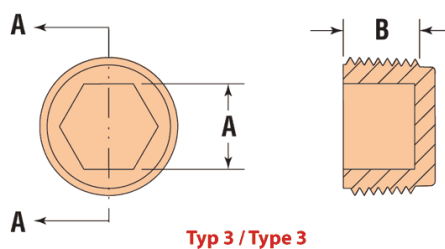
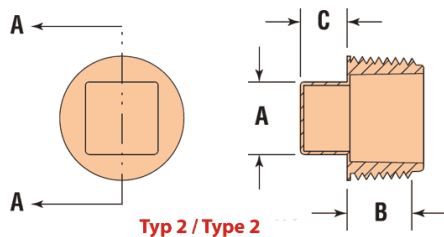


## H-PTN -

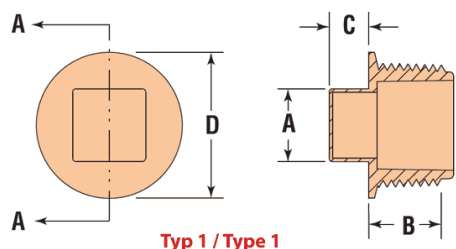

### Details:

- **Material: HDPE**
- **Colour: black**
- Temperature Range: -18°C to 74°C
- Not intended for permanent applications; commonly used for low-pressure testing and in-plant processing.
- Keep contaminants and moisture from threaded ports.
- Applicable Spec: MIL-C-5501/5, NAS 840.

| Symbol  | Type | Ext. thread | Wrench size<br>A | B    | C   | D    | Material | Color |
|---------|------|-------------|------------------|------|-----|------|----------|-------|
|         |      |             | [mm]             |      |     |      |          |       |
| H-G5444 | 1    | NPT 3/4     | 16               | 13.2 | 6.4 | 31.8 | HDPE     | black |