




## H-PTN -

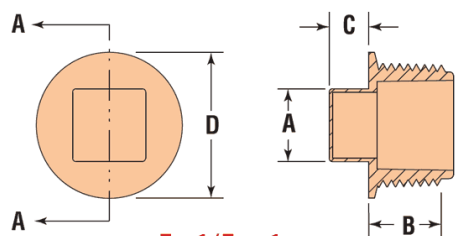

**Typ 1 / Type 1**

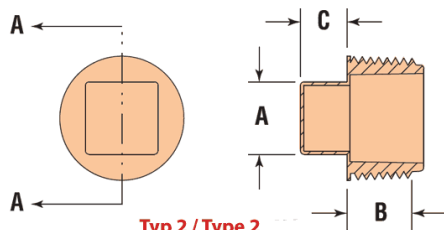

**Typ 2 / Type 2**

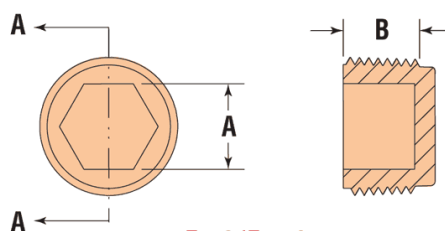

**Typ 3 / Type 3**



### Details:

- **Material: HDPE**
- **Colour: black**
- Temperature Range: -18°C to 74°C
- Not intended for permanent applications; commonly used for low-pressure testing and in-plant processing.
- Keep contaminants and moisture from threaded ports.
- Applicable Spec: MIL-C-5501/5, NAS 840.

| Symbol  | Type | Ext. thread | Wrench size<br>A | B    | C    | D    | Material | Color |
|---------|------|-------------|------------------|------|------|------|----------|-------|
|         |      |             | [mm]             | [mm] | [mm] | [mm] |          |       |
| H-G5459 | 3    | NPT 1       | 16               | 13.5 | -    | -    | HDPE     | black |