


## H-SMCG - Liquid Tight Cordgrips

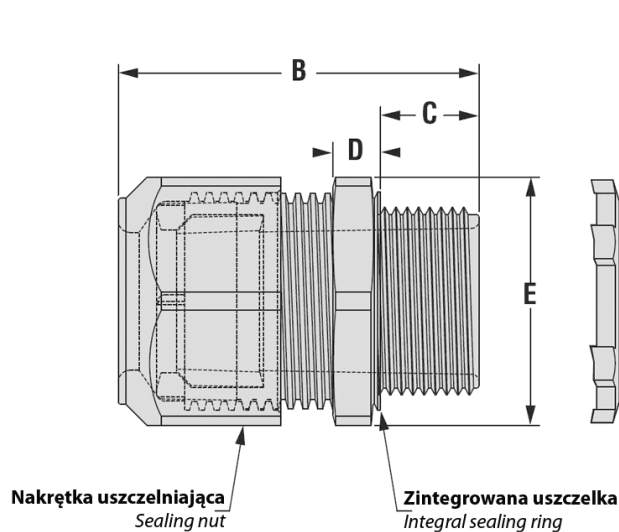

### Details:

- **Material:** Nylon 6/6 + uszczelka TPE
- **Flammability rating:** UL94-V2
- **Temperature rating:**
  - **Static:** -40°C do 115°C
  - **Dynamic:** -20°C do 100°C
- **IP rating:** IP68
- Approved for NEMA 4, 4X, 6 and 6P applications.
- Provide a watertight seal for PV module output leads to inverters.
- Designed for solar rooftop or combiner box installations.
- UV resistant nylon construction with TPE Sealing Gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- No disassembly required for installation.
- Cordgrips provided with assembled metal locknut.

| Symbol        | Cable diameter | Type  | Number of wires | NPT Thread | Mounting hole diameter A | B    | Thread length C | D    | Wrench size E | Material | Flammability | Standard pack |
|---------------|----------------|-------|-----------------|------------|--------------------------|------|-----------------|------|---------------|----------|--------------|---------------|
|               | [mm]           |       |                 | [in]       | [mm]                     | [mm] | [mm]            | [mm] | [mm]          |          |              | [szt./pcs]    |
| H-M3321GBY-SM | 5.5            | USE-2 | 31              | 2          | 60.8                     | 74.3 | 20.1            | 10.7 | 69.3          | PA 66    | UL94 V-2     | 50            |