



## H-LTSCG - Liquid Tight Cordgrips

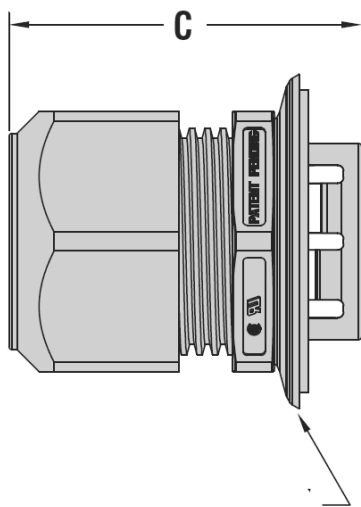

**Uszczelka / kołnierz uszczelniający**  
*Sealing flange/washer construction*



**Sugerowany otwór  
 do montażu bezgwintowego**  
*Suggested clearance hole  
 for nonthreaded mounting*



### Details:

- **Body material:** Nylon 6/6
- **Washer material:** TPR lub NBR
- **Colour:** black
- Ingress protection: IP65
- Easy installation - securely snap into a range of panel thicknesses - up 3,2 mm - with no tools or locknuts required.
- Sealing flange prevents sealing washer displacement due to water velocity to ensure a liquid tight IP 65 seal.
- Eliminate need for locknut or threaded hole to achieve liquid tight seal at panel; perfect for low clearance installation where locking nut access is limited.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.
- Foam washer included.
- Rotation prevented when used in Double D mounting holes.
- We recommend using the fitting with the smallest maximum diameter that will fit your application.

| Symbol  | Mounting hole dimentions<br>A × B | C    | Cable diameter range | Material | Color |
|---------|-----------------------------------|------|----------------------|----------|-------|
|         | [mm]                              |      | [mm]                 |          |       |
| H-M3848 | 34.9 × 31.8                       | 52.1 | 15.0 - 25.4          | PA 66    | black |