


H-SMCG - Liquid Tight Cordgrips

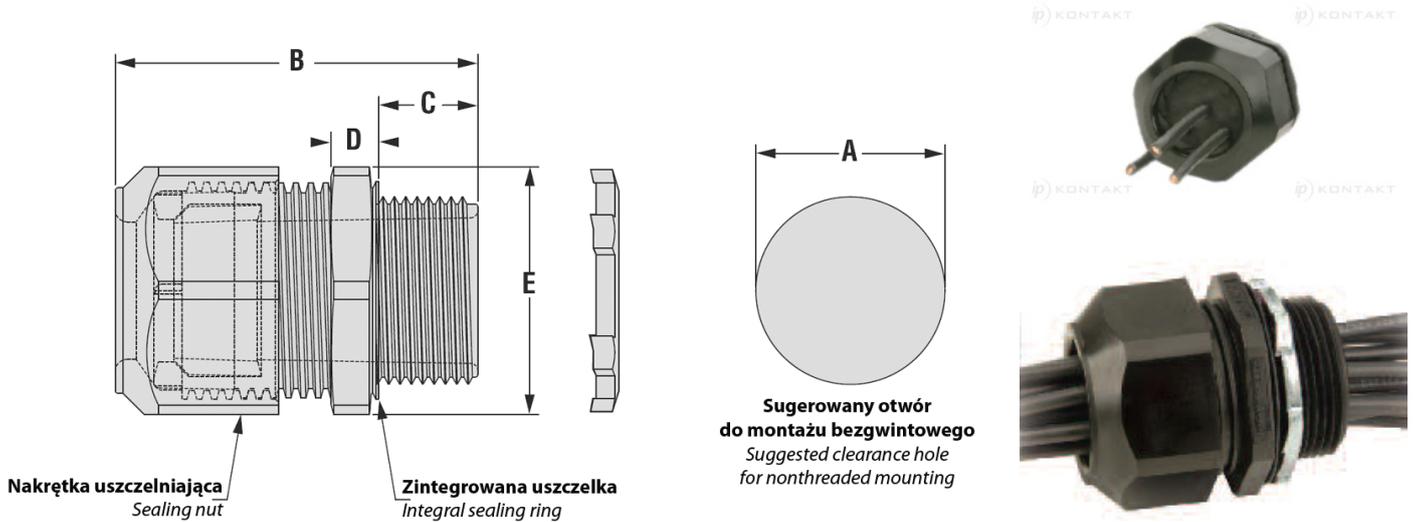

Details:

- **Material:** Nylon 6/6 + uszczelka TPE
- **Flammability rating:** UL94-V2
- **Temperature rating:**
 - **Static:** -40°C do 115°C
 - **Dynamic:** -20°C do 100°C
- **IP rating:** IP68
- Approved for NEMA 4, 4X, 6 and 6P applications.
- Provide a watertight seal for PV module output leads to inverters.
- Designed for solar rooftop or combiner box installations.
- UV resistant nylon construction with TPE Sealing Gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- No disassembly required for installation.
- Cordgrips provided with assembled metal locknut.

Symbol	Cable diameter	Type	Number of wires	NPT Thread	Mounting hole diameter A	B	Thread length C	D	Wrench size E	Material	Flammability	Standard pack
	[mm]			[in]	[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
H-M4524GBW-SM	7.7	PV1000 lub USE-2	9	1.1/4	42.7	68.3	19.8	7.6	52.1	PA 66	UL94 V-2	50