

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-SMCG - Liquid Tight Cordgrips



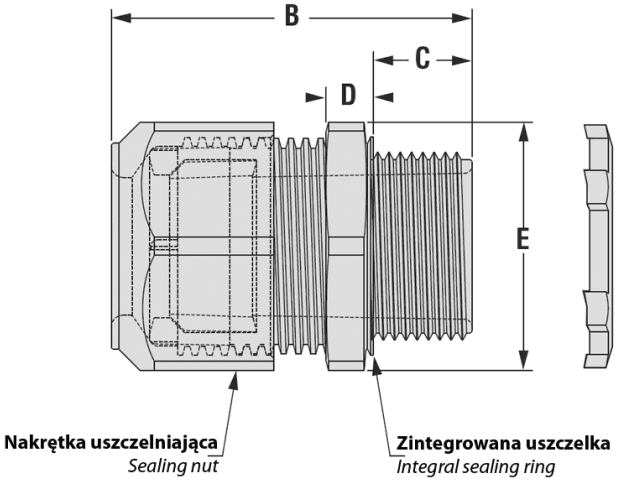

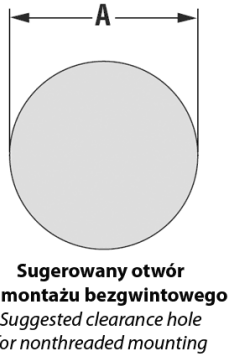

Details:

- **Material: Nylon 6/6 + uszczelka TPE**
- **Flammability rating: UL94-V2**
- **Temperature rating:**
  - **Static: -40°C do 115°C**
  - **Dynamic: -20°C do 100°C**
- **IP rating: IP68**
- Approved for NEMA 4, 4X, 6 and 6P applications.
- Provide a watertight seal for PV module output leads to inverters.
- Designed for solar rooftop or combiner box installations.
- UV resistant nylon construction with TPE Sealing Gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- No disassembly required for installation.
- Cordgrips provided with assembled metal locknut.

Symbol	Cable diameter	Type	Number of wires	NPT Thread	Mounting hole diameter A	B	Thread length C	D	Wrench size E	Material	Flammability	Standard pack
	[mm]			[in]	[mm]	[mm]	[mm]	[mm]	[mm]			[szt./pcs]
H-M4524GBW-SM	7.7	PV1000 lub USE-2	9	1.1/4	42.7	68.3	19.8	7.6	52.1	PA 66	UL94 V-2	50