

**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# H-SCG - Snap-In Cordgrip Strain Reliefs

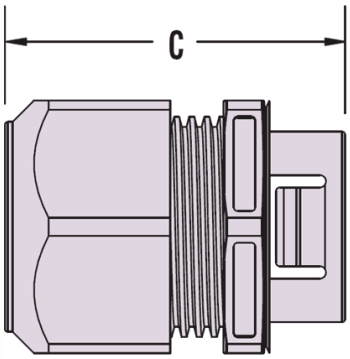


**Sugerowany otwór przelotowy do montażu zatrzaskowego**
*Suggested clearance hole for snap-in mounting*



Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Temperature Range: -18°C to 105°C**
- **Panel thickness: 1.6 mm - 3.2 mm**
- **Colour: BLK - black, GR - grey**
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install–no tools required.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.

| Symbol | Cable diameter range | Mounting hole dimentions A × B | C | Panel thickness range | Material | Flammability | Color |
|---|---|---|---|---|---|---|---|
| | [mm] | [mm] | [mm] | [mm] | | | |
| H-M4848 | 15.0 - 25.4 | 34.9 × 31.8 | 52.1 | 1.6 - 3.2 | PA 66 | UL94 V-2 | black |