



## H-SCG - Snap-In Cordgrip Strain Reliefs

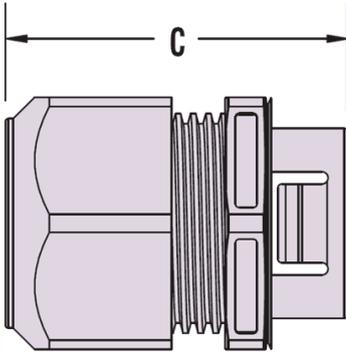

**Sugerowany otwór przelotowy  
 do montażu zatrzaskowego**  
*Suggested clearance hole  
 for snap-in mounting*

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Temperature Range: -18°C to 105°C**
- **Panel thickness: 1.6 mm - 3.2 mm**
- **Colour: BLK - black, GR - grey**
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install-no tools required.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.

Symbol	Cable diameter range	Mounting hole dimensions A × B	C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-M4848	15.0 - 25.4	34.9 × 31.8	52.1	1.6 - 3.2	PA 66	UL94 V-2	black