



## H-SCG - Snap-In Cordgrip Strain Reliefs

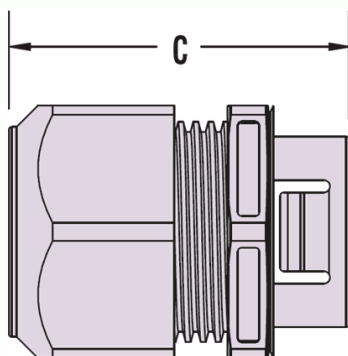

**Sugerowany otwór przelotowy  
do montażu zatrzaskowego**  
*Suggested clearance hole  
for snap-in mounting*

### Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Temperature Range:** -18°C to 105°C
- **Panel thickness:** 1.6 mm - 3.2 mm
- **Colour:** BLK - black, GR - grey
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install-no tools required.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.

| Symbol  | Cable diameter range | Mounting hole dimensions<br>A x B | C    | Panel thickness range | Material | Flammability | Color |
|---------|----------------------|-----------------------------------|------|-----------------------|----------|--------------|-------|
|         | [mm]                 | [mm]                              | [mm] | [mm]                  |          |              |       |
| H-M4873 | 36.8 - 39.6          | 60.3 x 57.2                       | 63.5 | 1.6 - 3.2             | PA 66    | UL94 V-2     | grey  |