



H-SCG-PT - Snap-In Cordgrip Strain Reliefs – Pigtail

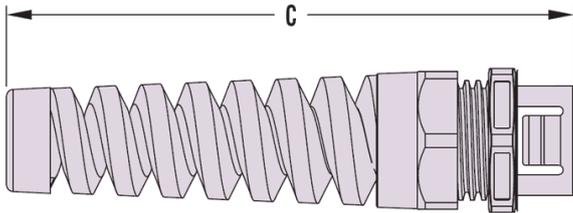

Sugerowany otwór przelotowy dla montażu bezgwintowego
Suggested clearance hole for nonthreaded mounting

Details:

- **Body material:** Nylon 6/6
- **Sealing gland material:** Buna N
- **Flammability:** UL94 V-2
- Certifications: UL File E51579, CAS File 093876
- Temperature Range: -18°C to 105°C

Symbol	Cable diameter range	A	B	C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-M4906	5.3 - 8.0	15.9	14	71.9	PA 66	UL94 V-2	black