



## H-SCG-PT - Snap-In Cordgrip Strain Reliefs – Pigtail

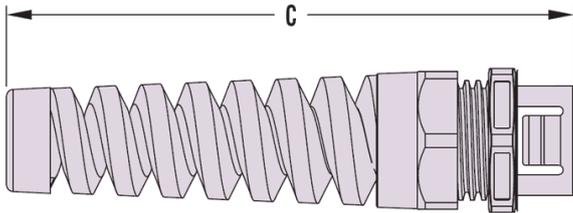

**Sugerowany otwór przelotowy dla montażu bezgwintowego**  
*Suggested clearance hole for nonthreaded mounting*

Details:

- **Body material: Nylon 6/6**
- **Sealing gland material: Buna N**
- **Flammability: UL94 V-2**
- Certifications: UL File E51579, CAS File 093876
- Temperature Range: -18°C to 105°C

Symbol	Cable diameter range	A	B	C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-M4932	9.8 - 12.4	27.8	24.6	124.5	PA 66	UL94 V-2	black