


## HLB-2 - Two cores cable breakout

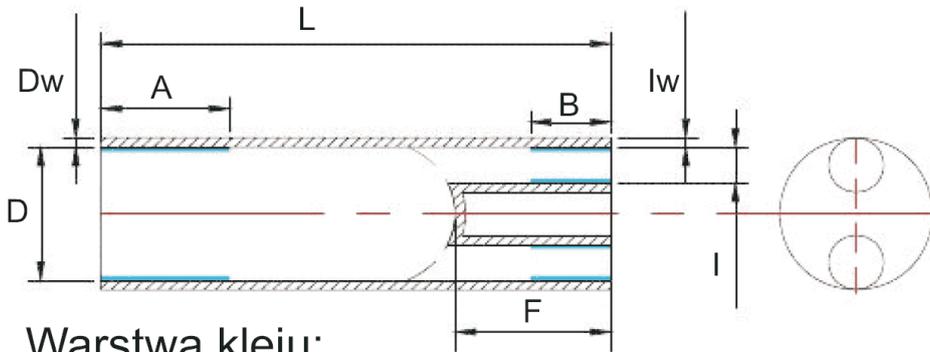

Warstwa kleju:  
 A-50mm B-25mm

Details:

- **Material: Crosslinked adhesive lined polyolefin**
- **Color: black**
- **UV resistant**
- **Min. shrink temperature: 100°C**
- **Min. full shrink temperature: 130°C**

Symbol	Min. diameter before shrink	Min. diameter before shrink	Max. diameter after shrink	Max. diameter after shrink	Length	F ±10%	Wall thickness	Wall thickness	A	B
	D	I	D	I	L ±10%	[mm]	Dw ±10%	lw ±10%	[mm]	[mm]
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB210-30-12	30	14	12	4.5	93	23	2.6	2.2	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do ±110°C
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skośna	ASTM D 2671	>10 <sup>13</sup> Ωcm
Absorbcja wody (23°C / 14 dni)	ISO 62	<1% (max)