


## HLB-2 - Two cores cable breakout

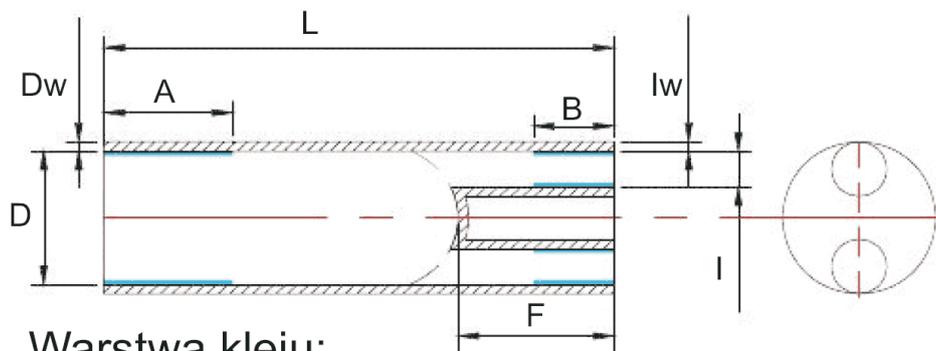

Warstwa kleju:  
 A-50mm B-25mm

Details:

- **Material: Crosslinked adhesive lined polyolefin**
- **Color: black**
- **UV resistant**
- **Min. shrink temperature: 1q0°C**
- **Min. full shrink temperature: 130°C**

Symbol	Min. diameter before shrink D	Min. diameter before shrink l	Max. diameter after shrink D	Max. diameter after shrink l	Length L ±10%	F ±10%	Wall thickness Dw ±10%	Wall thickness lw ±10%	A	B
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB215-40-16	40	15	16	5	125	35	2.1	2.1	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do ±110°C
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skośna	ASTM D 2671	>10 <sup>13</sup> Qcm
Absorbacja wody (23°C / 14 dni)	ISO 62	<1% (max)