


HLB-2 - Two cores cable breakout



Warstwa kleju:
 A-50mm B-25mm

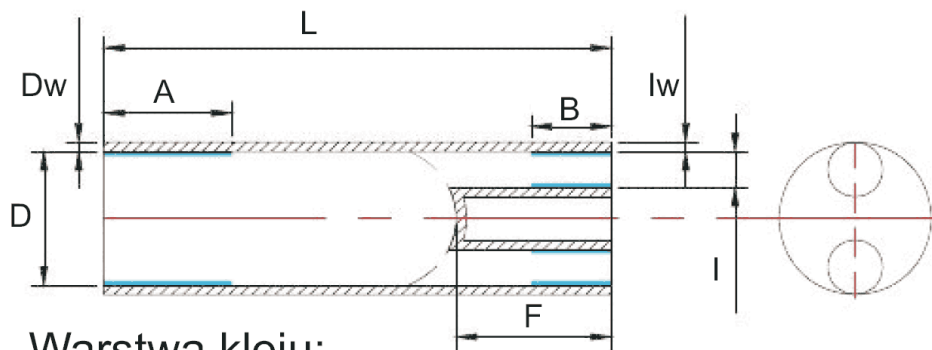

Details:

- **Material:** Crosslinked adhesive lined polyolefin
- **Color:** black
- **UV resistant**
- **Min. shrink temperature:** 1q0°C
- **Min. full shrink temperature:** 130°C

Symbol	Min. diameter before shrink D	Min. diameter before shrink I	Max. diameter after shrink D	Max. diameter after shrink I	Length L ±10%	F ±10%	Wall thickness Dw ±10%	Wall thickness lw ±10%	A	B
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB220-60-23	60	25	23	7.5	118	29	2.6	2.6	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do ±110°C
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skrośna	ASTM D 2671	>10 ⁻¹³ Qcm
Absorbcja wody (23°C / 14 dni)	ISO 62	<1% (max)