


HLB-4 - Four cores cable breakout



Warstwa kleju:
 A-50mm B-25mm

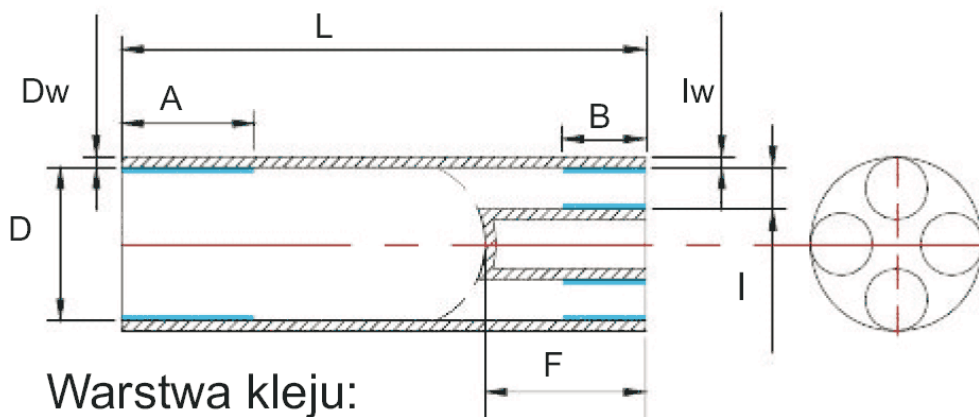

Details:

- **Material:** Crosslinked polyolefin
- **Color:** black
- **UV Resistant**
- **Min. shrink temperature:** 110°C
- **Min. full shrink temperature:** 130°C

Symbol	Min. diameter before shrink D	Min. diameter before shrink I	Max. diameter after shrink D	Max. diameter after shrink I	Length L $\pm 10\%$	F $\pm 10\%$	Wall thickness Dw $\pm 10\%$	Wall thickness lw $\pm 10\%$	A	B
	[mm]	[mm]	[mm]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]
HLB430-75-26	75	28	26	7	175	45	3.3	2.9	50	25

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do $\pm 110^\circ\text{C}$
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skrośna	ASTM D 2671	>10 ⁻¹³ Qcm
Absorbcja wody (23°C / 14 dni)	ISO 62	<1% (max)