


HSEC - Cable end caps with spiral adhesive coating

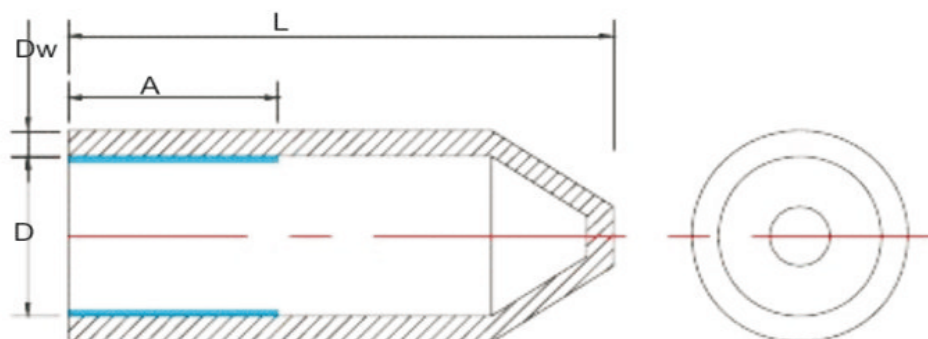

A - warstwa kleju (układ spiralny)

Details:

- **Material: Crosslinked polyolefin**
- **Cable end caps with spiral adhesive coating.**
- **Effectively offering protection against oxidation, ozone,**
- **UV Resistant**
- **Coated with conductive mastic to ensure environment seal**
- **Easily to fit into the cable end**
- **Min. full shrink temperature: 120°C**

Symbol	Min. diameter before shrink D	Max. diameter after shrink D	A ±10%	Length L ±10%	Wall thickness Dw ±5%	Cable diameter range
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
HSEC-120-25-8.5	25	8.5	30	68	2.8	10 - 20

Własności	Test	Wynik testu
Temperatura pracy	UL 224	-55°C do ±110°C
Wytrzymałość	ASTM D 2671	>13MPa
Wydłużenie	ASTM D 2671	300%
Starzenie cieplne	158°C/168 hrs	>10MPa >250%
Wytrzymałość dielektryczna	IEC 243	>15kV/mm
Oporność skrośna	ASTM D 2671	>10 ¹³ Ωcm
Absorbacja wody (23°C / 14 dni)	ISO 62	<1% (max)