
**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# O-MAGC -



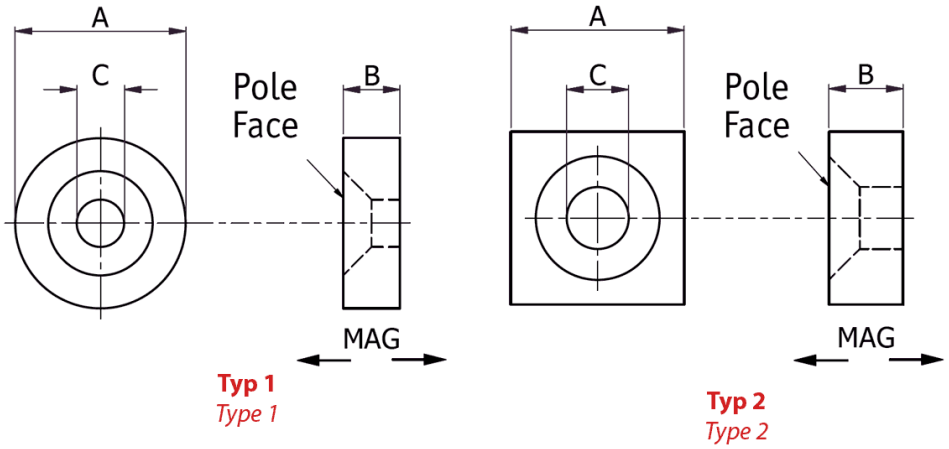


Details:

- These countersunk magnets are extremely versatile and the neodymium magnet is easily fixed using a simple countersunk screw
- They are triple coated (NiCuNi) for maximum protection against corrosion
- Maximum operating temperature: 100°C
- These magnets are available in both North and South facing polarities
- Type 1 is a round disc design
- Type 2 is a square design with a length and width of 10mm

| Symbol | Type | Facing polarity | A | B | C | Pull | Standard pack |
|---|---|---|---|---|---|---|---|
| | | | [mm] | [mm] | [mm] | | [szt./pcs] |
| O-MAGC-1-232-S | 1 | S | 23 | 20 | 6 | 23.2 kg | 1 |