


O-NC - Nylon conduit

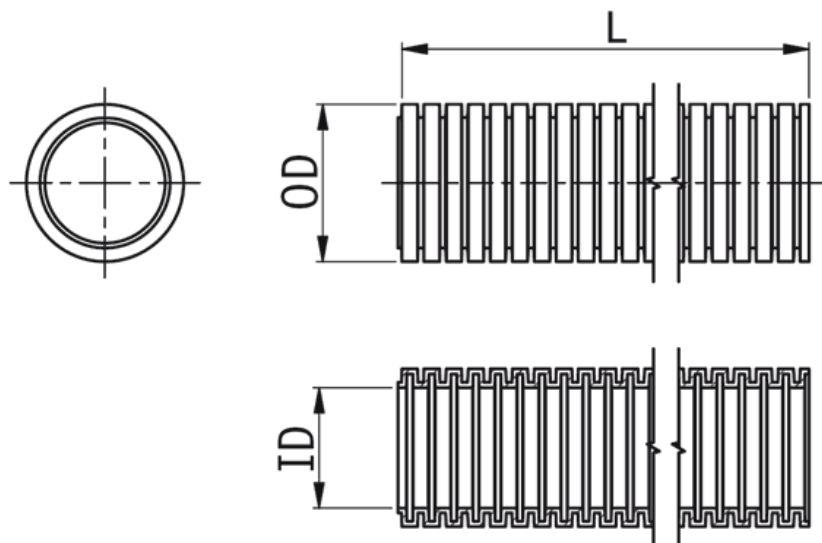

Details:

- **Material:** Nylon UL94V2
- **Color:** black
- Halogen, sulphur and phosphorus free
- Temperature range: -40 to 120°C (-20 to 100°C for moving applications)
- Highly flexible and high fatigue life
- High impact strength and recovers if crushed
- Self-extinguishing
- IP66 when used with standard fittings
- High abrasion resistant
- High UV resistance
- UL94 V2 flame retardancy
- Highly resistant to solvents and oils
- Typical applications include: usage with all types of machinery and in public buildings

Symbol	Type	Thread	Nominal diameter	Length	Ext. diameter OD	Int. diameter ID	Min. bending radius	Material	Flammability	Color	Standard pack
			[mm]		[mm]	[mm]	[mm]				[szt./pcs]
O-NC-28-25	conduit reel	-	28	25	28.5	22.8	50	PA	UL94 V-2	black	1