


O-WRGK - Threaded Inserts

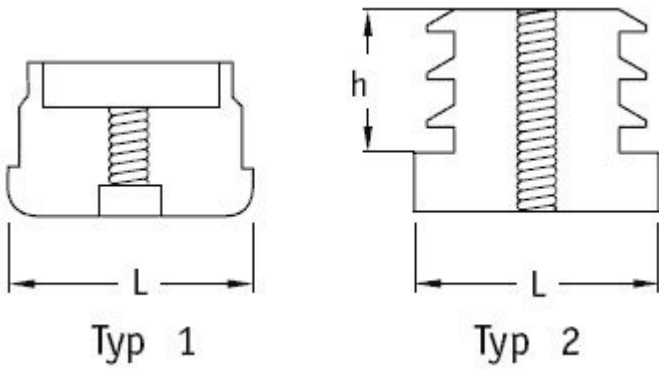

Details:

- Material: see table
- Can be used with either adjustable feet (O-SWNP, O-SWOP, O-SWP, O-SNNP, O-SOP) or adjustable tilt glides (O-SNP)
- Suitable for wall thickness of 1.0 - 2.0mm
- Standard pack: see table

Symbol	Type	Shape	Gauge	Thread	L	L	h	Material	Color	Standard pack
			[mm]		[in]	[mm]	[mm]			[szt./pcs]
O-WRGO2-16-M6	2 - metric	round	-	M6	-	16	34	PA	black	3500