


OR-DL-ATEX-PG - PG thread cable glands ATEX

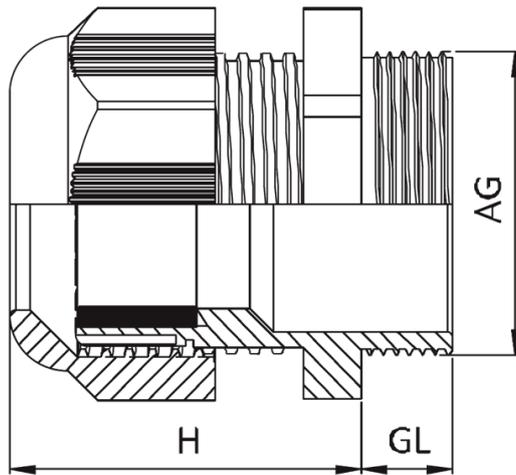

Details:

- **Material: Polyamide PA6**
- **Color:**
 - **Black (RAL 9005),**
 - **Blue (RAL 5015),**
 - **Black Blue (RAL 9005, RAL 5015)**
- Protection class: IP 68 5 Bar
- Temperature range: -30°C to +100°C
- Protection code: II 2G Ex eb IIC Gb II 2D Ex tb IIIC Db
- Certificate: IEP 20 ATEX 0750 X ATEX, ROHS, CE, PT, TUV
- Application area: ZONE1, ZONE2, ZONE21, ZONE22, Gas Group HA, IIB, IIC
- Cable type: unarmored
- **Connection thread: PG (DIN 40430)**

| Symbol | PG thread AG | H | Thread length GL | Wrench size | Cable diameter range | Material | Color |
|------------------------|-----------------|------|---------------------|-------------|----------------------|----------|--------------|
| | | [mm] | [mm] | [mm] | [mm] | | |
| OR-DL-ATEX-PG9-8-BLKBL | PG9 | 28 | 8 | 19 | 4 - 8 | PA 6 | black + blue |