


OR-DL-MH-PG - Multihole and flathole cable glands

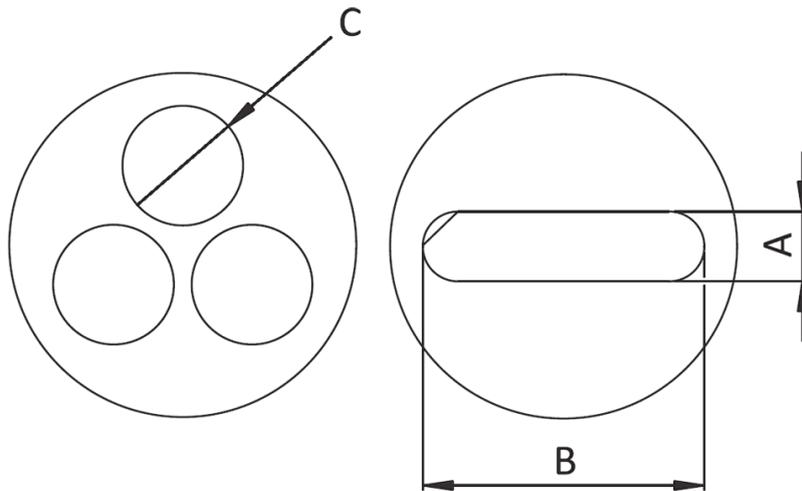

OR-DL-MH

OR-DL-FH

Details:

- **Body material: PA 66 V2**
- Colour: grey (RAL 7001), Light grey (RAL 7035), black (RAL 9005)
- Thread: PG (DIN 40430)
- Protection class: IP 65
- Working temperature: -30°C to +80°C (150°C short-term)
- Antivibration protection
- UV resistance
- Halogen free

Symbol	PG thread	Number of wires	Cable shape	Wire height A	Wire width B	Cable diameter C	Material	Flammability	Color
				[mm]	[mm]	[mm]			
OR-DL-MH-PG13.5-2-6-DGR	PG13.5	2	round	-	-	6	PA 66	UL94 V-2	dark grey