


OR-DL-WM-PG - Plastic cable glands, ventilated, PG thread

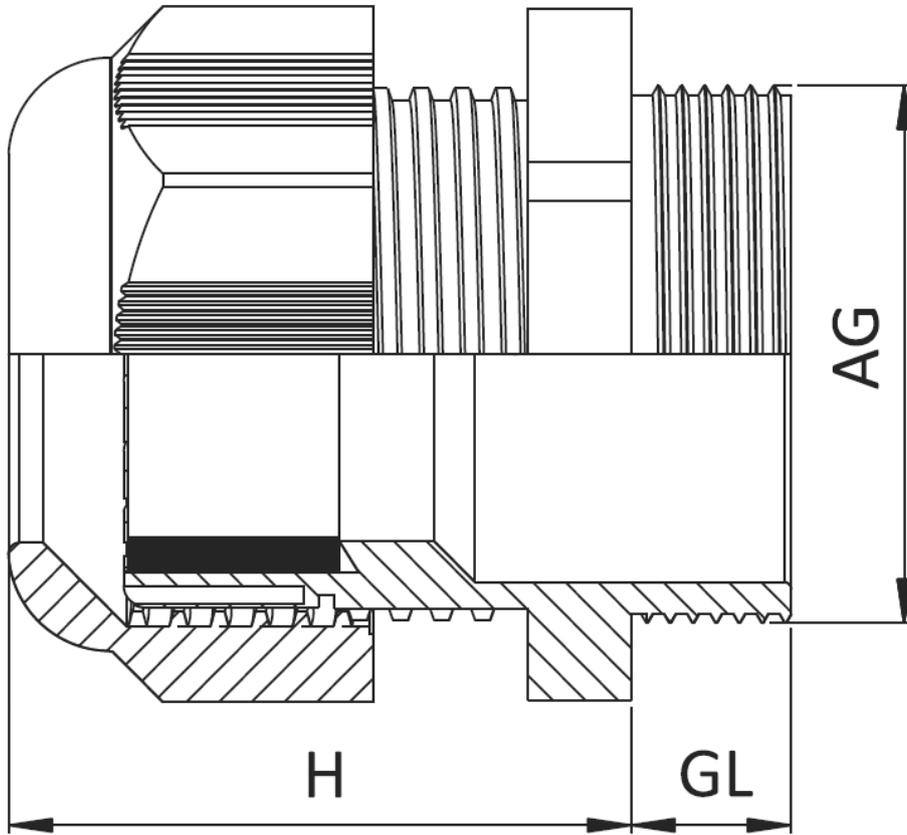

Details:

- **Body material: brass with/without nickel plated / AISI303/316L Stainless Steel**
- **Plastic part: PA6 V2 / V0**
- **Sealing: TPV / Silicone**
- **O-ring: NBR / EPDM / Silicone**
- **Vent part: Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)**
- **Protection class: IP68**
- **Temperature Range: -40 °C +105 °C**
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device

| Symbol | PG thread | H | Thread length GL | Wrench size SW | Mounting hole diameter | Cable diameter range | Material |
|------------------|-----------|------|---------------------|-------------------|------------------------|----------------------|----------|
| | | [mm] | [mm] | [mm] | [mm] | [mm] | |
| OR-DL-WMB-PG11-L | PG11 | 33.5 | 8 | 20 | 19 | 5 - 10 | brass |