


OR-DL-WM-M - Metal cable glands, ventilated, metric thread

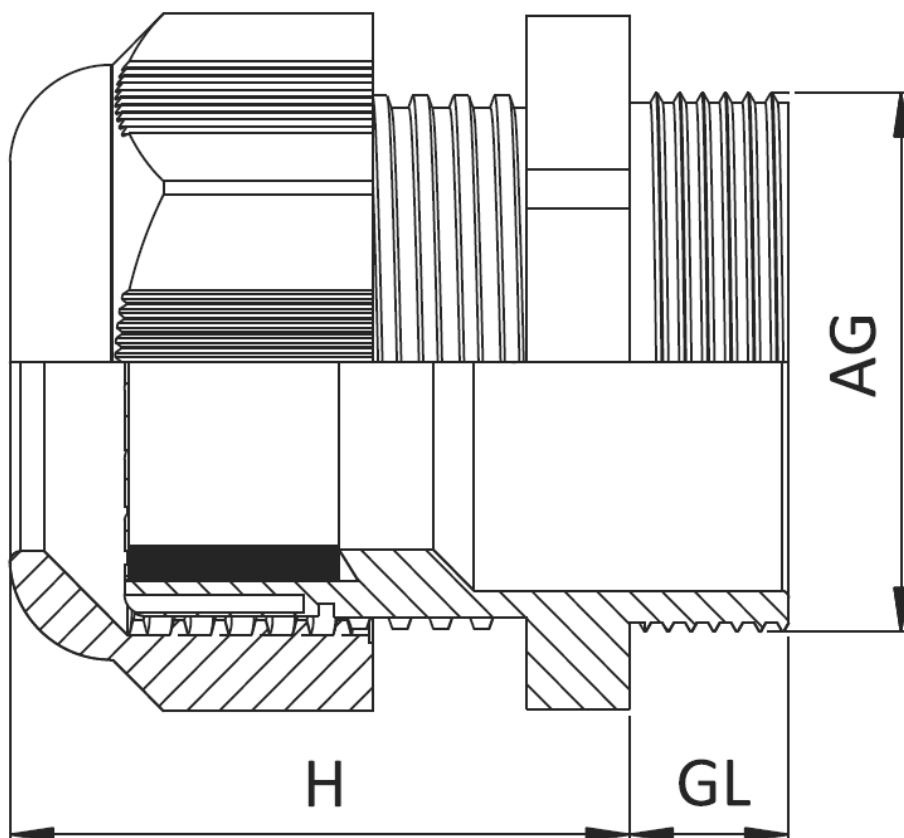

Details:

- **Body material:** brass with/without nickel plated / AISI303/316L Stainless Steel
- **Plastic part:** PA6 V2 / V0
- **Sealing:** TPV / Silicone
- **O-ring:** NBR / EPDM / Silicone
- **Vent part:** Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)
- **Protection class:** IP68
- **Temperature Range:** -40 °C +105 °C
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device

Symbol	Metric thread	H	Thread length GL	Wrench size SW	Mounting hole diameter	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	
OR-DL-WMS-M12x1.5-L	M12x1.5	31.5	8	17	12.3	4 - 8	stainless steel