
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

OR-DL-WM-M - Metal cable glands, ventilated, metric thread



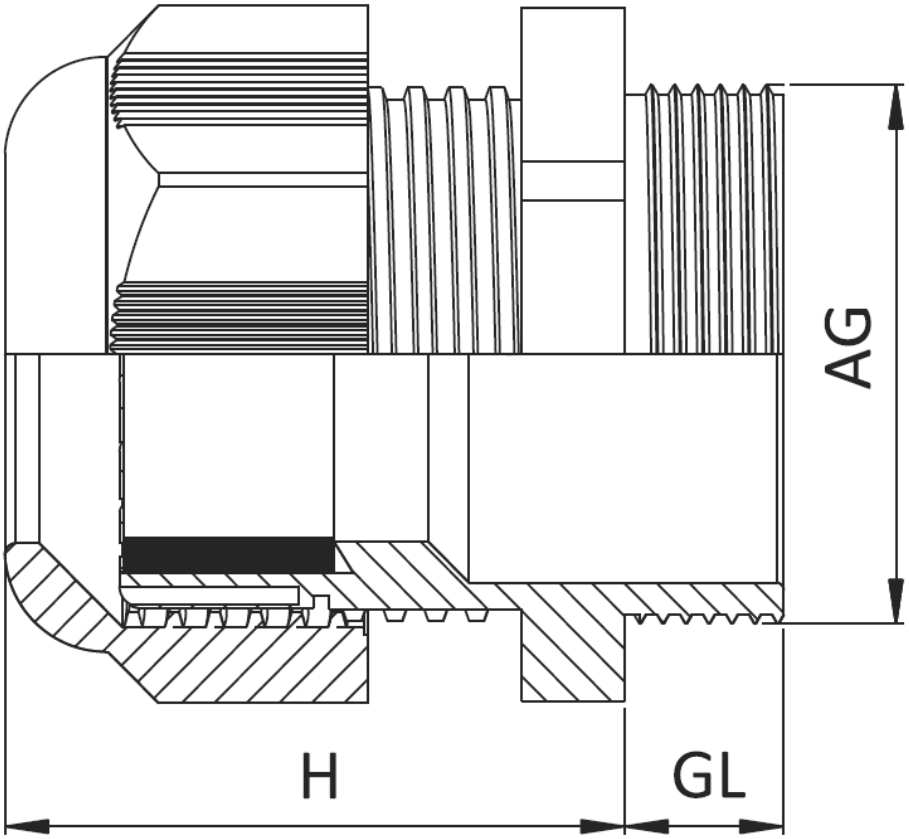

Details:

- **Body material: brass with/without nickel plated / AISI303/316L Stainless Steel**
- **Plastic part: PA6 V2 / V0**
- **Sealing: TPV / Silicone**
- **O-ring: NBR / EPDM / Silicone**
- **Vent part: Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)**
- **Protection class: IP68**
- **Temperature Range: -40 ºC +105 ºC**
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device

Symbol	Metric thread	H	Thread length GL	Wrench size SW	Mounting hole diameter	Cable diameter range	Material
		[mm]	[mm]	[mm]	[mm]	[mm]	
OR-DL-WMS-M16x1.5-RL	M16×1.5	31.5	8	17	16.3	4 - 8	stainless steel