


OR-DL-WP-M - Plastic cable glands, ventilated, metric

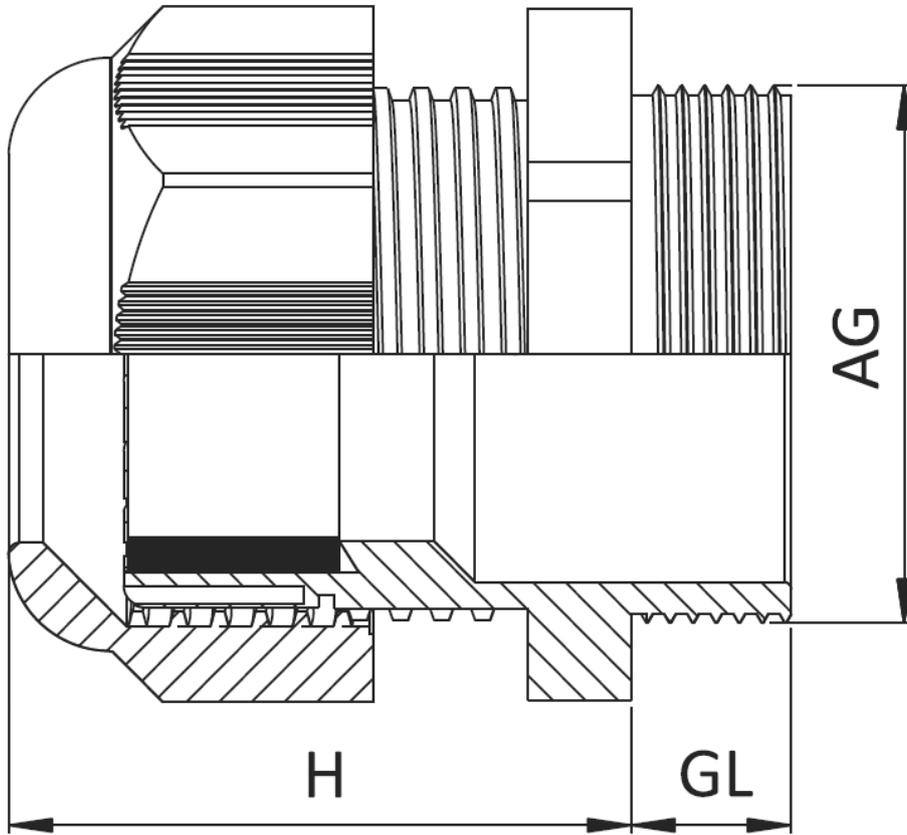

Details:

- **Body material: PA6**
- **Membrane material: Hydrophobic - Oleophobic**
- **O-ring material: NBR / EPDM**
- **Gasket material: thermoplastic vulcanized TPV**
- **Colour: RAL 7001 (Gray), RAL 7035 (Light Gray) or RAL 9005 (Black)**
- Thread: metric EN 60423
- Protection: IP68
- Continuous heat resistance: -30°C to +80°C
- Short term heat resistance: +150 ° C
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device
- Average air flow: 70 l/h
- Water intrusion: 0.1 bar

Symbol	Metric thread AG	H	Thread length GL	Wrench size	Cable diameter range	Mounting hole diameter	Material	Color
		[mm]	[mm]					

Symbol	Metric thread AG	H	Thread length GL	Wrench size	Cable diameter range	Mounting hole diameter	Material	Color
		[mm]	[mm]	[mm]	[mm]	[mm]		
OR-DL-WP-M20X1.5-L-LGR	M20×1.5	40.5	10	24	6 - 12	20.3	PA 6	light grey