


## OR-DLA-PG - Nylon cable gland with PG thread

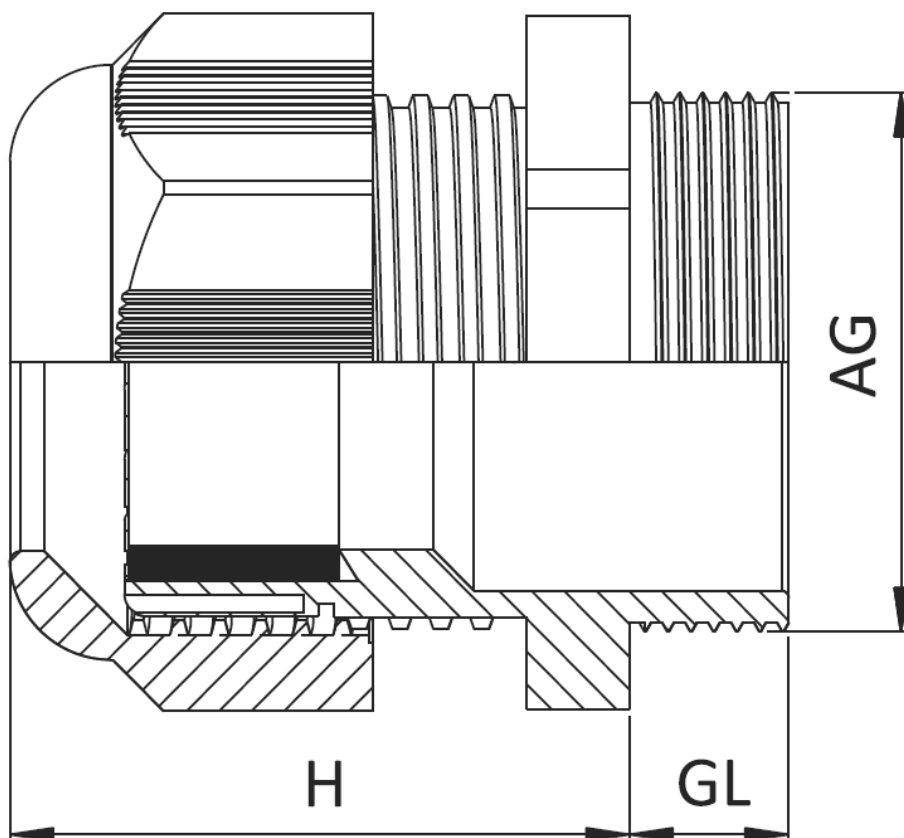

### Details:

- **Body material: PA 6 V2**
- Colour:
  - grey (RAL 7001)
  - light grey (RAL 7035)
  - black (RAL 9005)
- Thread: PG (DIN 40430)
- Protection class: IP 68 5 bar
- Working temperature: -30°C to +80°C (150°C short-term)
- Antivibration protection
- UV resistance
- Halogen free
- Type 1: standard version
- Type 2: long version

| Symbol         | Type | PG thread<br>AG | H    | Thread length<br>GL | Wrench size | Cable diameter range | Material | Flammability | Color      |
|----------------|------|-----------------|------|---------------------|-------------|----------------------|----------|--------------|------------|
|                |      |                 | [mm] | [mm]                | [mm]        | [mm]                 |          |              |            |
| OR-DLA-PG48-GR | 1    | PG48            | 55   | 14                  | 65          | 34 - 44              | PA 6     | UL94 V-2     | light grey |