


**OR-MDLA-M - Brass cable gland with metric thread, nickel plated**

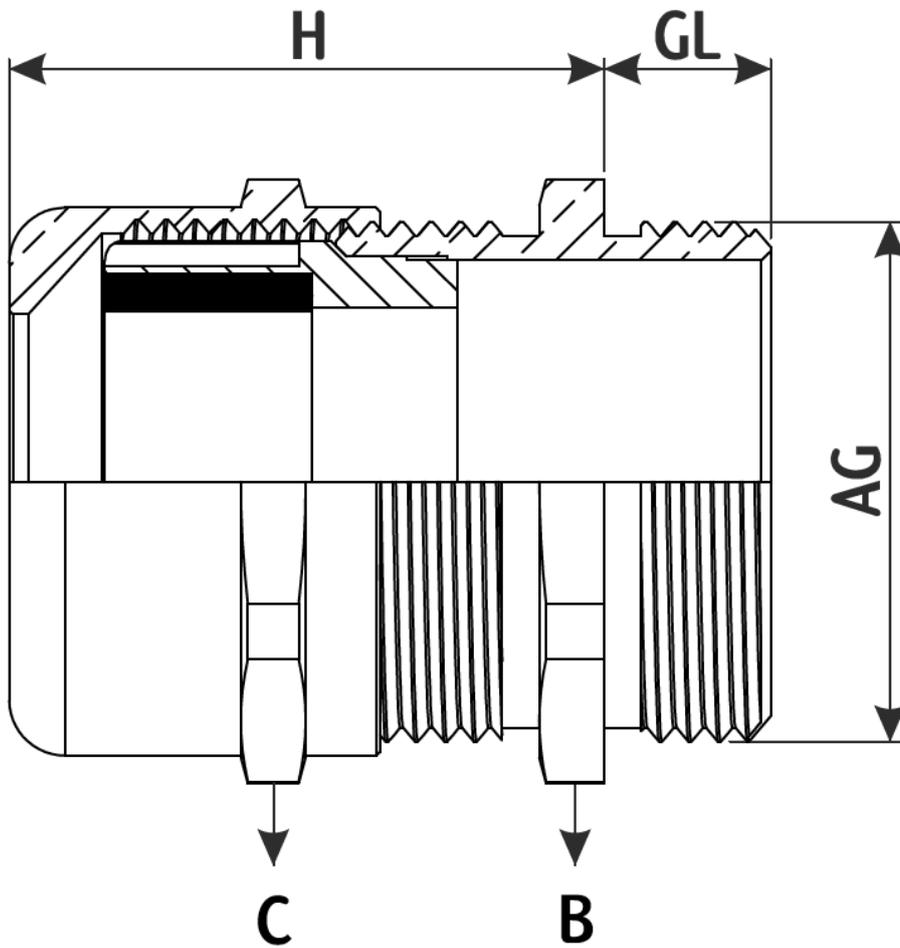

**Details:**

- **Material:**
  - Body: brass, nickel plated
  - Clamping insert: PA6 UL94 V2
  - Sealing ring: TPV
  - O-Ring: NBR
- Thread: metric (EN 60423)
- Protection class: IP68 (5 bar)
- Temperature range: -40°C to +100°C
- Easy to assemble
- Halogen free

| Symbol        | Metric thread<br>AG | H    | Thread length<br>GL | B    | C    | Cable diameter range<br>[mm] | Material             |
|---------------|---------------------|------|---------------------|------|------|------------------------------|----------------------|
|               |                     | [mm] | [mm]                | [mm] | [mm] |                              |                      |
| OR-MDLA-L-M16 | M16x1.5             | 23   | 12                  | 18   | 17   | 4 - 8                        | brass, nickel plated |